



TRILUX twenty3 LED luminaires

**The smartest
way to get
the job done**

www.trilux-twenty3.com

Win! 2323 €

in TRILUX twenty3 luminaires

3 attempts
per person!



Play now at
www.trilux-twenty3.com/2323

The raffle is a limited-time promotion. Participants have the opportunity to win changing prizes during the promotion period. The main prize will be drawn once among all participants at the end of the promotion period. All details about the competition, the promotion period and the conditions of participation can be found at: www.trilux-twenty3.com/2323





Always stay well informed about TRILUX twenty3

With TRILUX Light Snacks you'll always be the first to know about new products and special offers.

Register now!

www.trilux-twenty3.com/info

Index

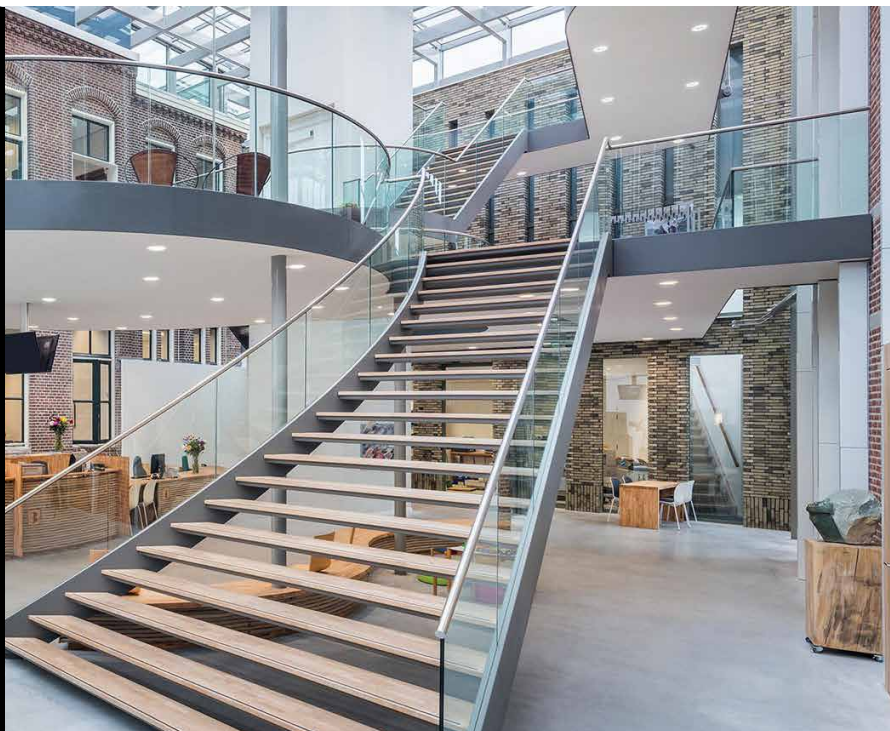

2315 LED

Weather-proof
luminaires

8



2325 LED

Planar
downlights

10



2330 LED

Recessed
luminaires

12



2340 LED

Wall luminaires
and ceiling
luminaires

14



2345 LED

Wall luminaires and
ceiling luminaires
IP 65

16



2350 LED

Surface-mounted
luminaires

18



2360 LED

Suspended
luminaires

20



2380 LED

Highbay
luminaires

22

The **smartest** way to get the job **done**

TRILUX twenty3 offers you TRILUX lighting expertise in a compact and flexible way. The portfolio supplies precisely the quality that your day-to-day business needs – and at a particularly appealing price-performance ratio. In this way you can do your daily tasks cleverly and quickly. TRILUX twenty3 LED luminaires are exclusively available from electrical wholesalers.

TRILUX twenty3 LED luminaires

Thanks to the lean portfolio, you have the answer to the 1,000 questions from your customers and can meet all standard requirements. All luminaires are ENEC-certified, very efficient and score points through simple installation and a reliable service life. Many are particularly flexible due to multi-lumen technology. TRILUX twenty3 is your smartest way to get the job done!





Multi-lumen technology

Multi-lumen technology

A major advantage of many TRILUX twenty3 LED luminaires is their multi-lumen technology. Via an integrated switch, the same luminaire can be operated at 2 or 3 different luminaire luminous flux levels. This gives you the ability to adjust the light to the needs of your customer even during installation.



LiveLink Ready

Light management easily possible

TRILUX twenty3 is also ready for take-off in terms of lighting management and sensor control: a large proportion of the luminaires are DALI dimmable and therefore LiveLink-ready. Control via the TRILUX LiveLink lighting management system and the integration of sensors can be easily implemented.

Get the job done with TRILUX twenty3!



3-year
guarantee



All luminaires are
ENEC-certified



Service life
50,000 h

Get your TRILUX twenty3
luminaires now and get
the job done!

www.trilux-twenty3.com





Overview of **TRILUX** twenty3

TRILUX twenty3 gives you answers to the questions about professional lighting in day-to-day business. Here you will find the complete overview, ranging from weather-proof, surface-mounted and recessed luminaires to highbays.



2315 LED

Weather-proof luminaires




2325 LED

Planar downlights



2330 LED

Recessed luminaires

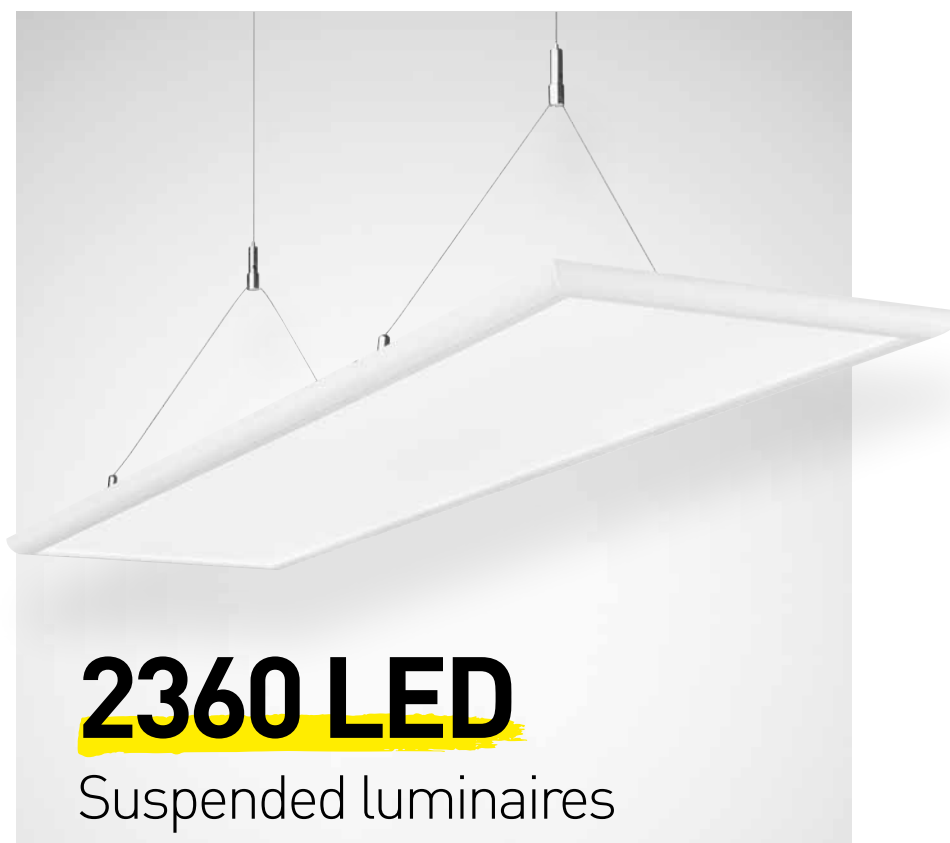



2315 LED

LED Water-proof luminaire




The 2315 LED is the ideal weather-proof luminaire for e.g. multi-storey car parks, storage areas, production areas and canopied outdoor areas. As an ideal 1:1 LED refurbishment solution with multi-lumen function, it can be mounted to walls and ceilings, can be suspended, is very robust and also easy and flexible to install. This will get the job done!



Why you'll get the job done with the 2315 LED weather-proof luminaire

- Rapid connection system with tool-free bayonet catch reduces installation effort.
- Thanks to slidable mounting clips, can be individually adapted to the existing fixing points.
- Variants available with integrated through-wiring.
- Suitable for wall, ceiling and suspended mounting.
- UV-stabilised polycarbonate – robust and reliable.
- High efficiency (115 lm/W) and reliable service life (50,000 h, L65).
- Flexible luminous flux setting thanks to multi-lumen technology (3,800 lm and 2,600 lm or 5,500 lm and 3,800 lm).

2315 LED at a glance

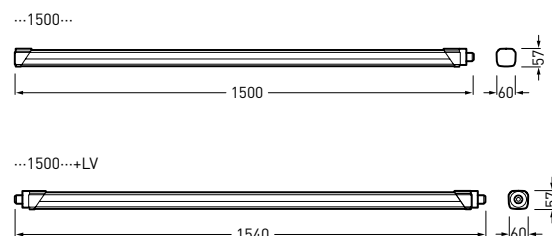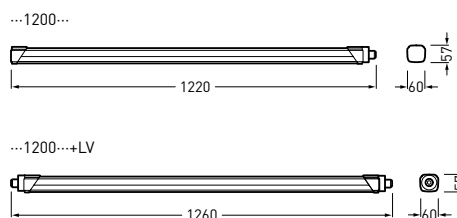

Dimensions (L x W x H):

1200: 1,220 x 60 x 57 mm

1500: 1,500 x 60 x 57 mm

Version with through-wiring (+LV):

L = 1,260 / 1,540 mm

Luminaire luminous flux:

1200: 3,800 lm, 2,600 lm (multi-lumen)

1500: 5,500 lm, 3,800 lm (multi-lumen)

Connected load:

48/33 W, 33/23 W

Protection rating, safety class:

IP65 / IK08 / I

Colour Rendering Index: Ra > 80

Colour Temperature: 4,000 K

Weight:


1200: 1.0 kg, 1500: 1.2 kg

All versions of 2315 LED

Product reference	TOC	Luminous flux [lm]	Wattage [W]	Light colour [K]	Dimensions L x W x H [mm]	Replacement
Multi-lumen (adjustable luminaire luminous flux)						
2315 G2 1200 38/26/ML-840 ET PC	73 746 40	3,800 / 2,600	33 / 23	4,000	1220 x 60 x 57	1 x 36 W 2 x 36 W
2315 G2 1500 55/38/ML-840 ET PC	73 747 40	5,500 / 3,800	48 / 33	4,000	1500 x 60 x 57	1 x 58 W 2 x 58 W
Multi-lumen (adjustable luminaire luminous flux) with through-wiring						
2315 G2 1200 38/26/ML-840 ET PC +LV	73 748 40	3,800 / 2,600	33 / 23	4,000	1260 x 60 x 57	1 x 36 W 2 x 36 W
2315 G2 1500 55/38/ML-840 ET PC +LV	73 749 40	5,500 / 3,800	48 / 33	4,000	1540 x 60 x 57	1 x 58 W 2 x 58 W

All technical details, as well as weights and dimensions have been carefully compiled. Errors excepted. Product images are for indicative purposes only and may differ from the original. We reserve the right to make changes for the purpose of further development.



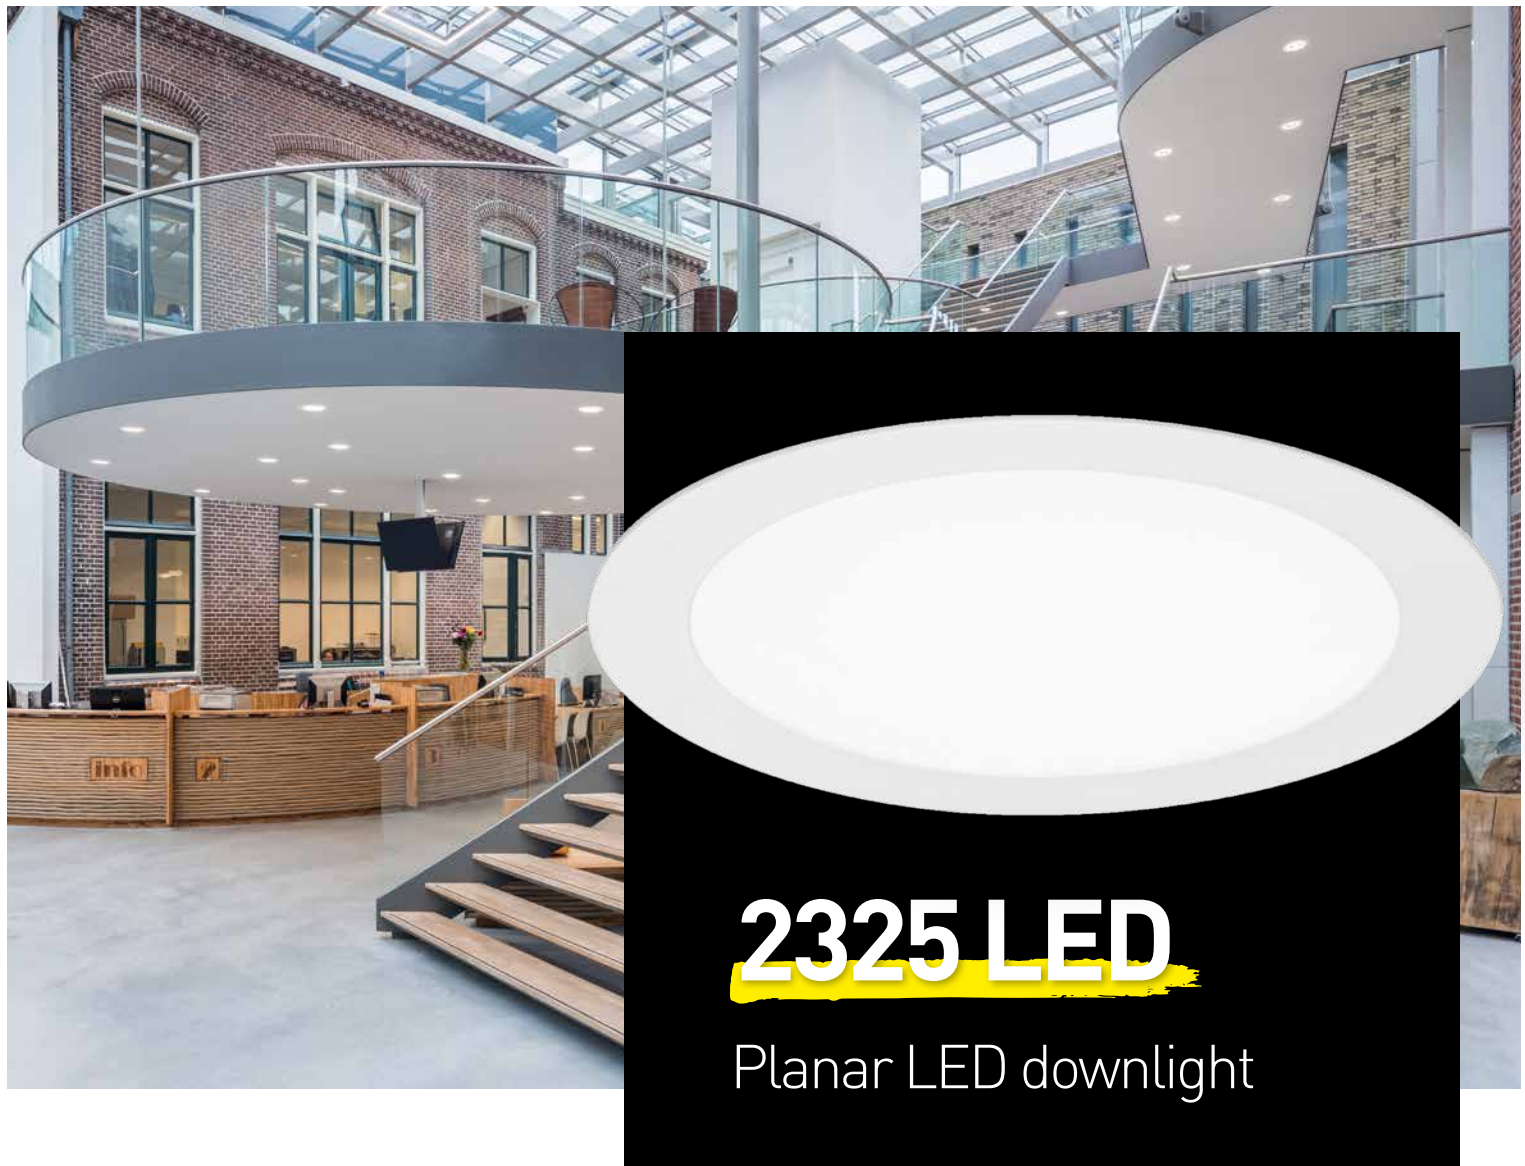

2325 LED

Planar LED downlight



The 2325 LED downlight is the perfect solution for ceilings with a shallow recess depth, and also fits into any suspended ceiling. The lighting appearance is uniform, and thanks to multi-lumen technology, the luminaire luminous flux can be flexibly adjusted. Ideal for reception areas, hotels, restaurants, sales spaces, exhibition spaces, meeting and relaxation rooms as well as corridors. This will get the job done!



Why you'll get the job done with the 2325 LED downlight

- Flexible setting of luminaire luminous flux thanks to multi-lumen technology (1,800 lm, 1,000 lm).
- Tool-free ceiling installation due to rapid-mounting catches, can be covered with insulation material.
- Very low recess depth (31 mm incl. control gear unit).
- Pleasant light effect due to uniform illumination.
- 1:1 replacement of conventional luminaires offering time and cost savings during refurbishment.
- Service life 50,000 h.

2325 LED at a glance

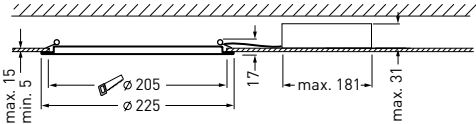

Dimensions (Ø x H):

Ø 225 x 31 mm

Colour temperature:

3,000 K, 4,000 K

Protection rating, safety class:

IP20 / IP44 (on room side) / IK02 / II

Luminaire luminous flux:

1,800 lm, 1,000 lm (multi-lumen)

Connected load:

22 W, 11 W

Weight:


0.8 kg

All versions of 2325 LED

Product reference	TOC	Luminous flux [lm]	Wattage [W]	Light colour [K]	Dimensions Ø x H [mm]	Replacement
DALI dimmable						
2325 C07 0A LED1800-830 ETDD	72 417 51	1,700	22	3,000	Ø 225 x 17	1 x 18 W TC-TEL / 1 x 26 W TC-TEL 1 x 32 W TC-TEL / 2 x 13 W TC-TEL 2 x 18 W TC-TEL
2325 C07 0A LED1800-840 ETDD	72 416 51	1,800	22	4,000	Ø 225 x 17	1 x 18 W TC-TEL / 1 x 26 W TC-TEL 1 x 32 W TC-TEL / 2 x 13 W TC-TEL 2 x 18 W TC-TEL
Multi-lumen (adjustable luminaire luminous flux)						
2325 C07 0A LED 18/10/ML-830 ET	72 405 40	1,700 / 950	22 / 11	3,000	Ø 225 x 17	1 x 18 W TC-TEL / 1 x 26 W TC-TEL 1 x 32 W TC-TEL / 2 x 13 W TC-TEL 2 x 18 W TC-TEL
2325 C07 0A LED 18/10/ML-840 ET	71 431 40	1,800 / 1,000	22 / 11	4,000	Ø 225 x 17	1 x 18 W TC-TEL / 1 x 26 W TC-TEL 1 x 32 W TC-TEL / 2 x 13 W TC-TEL 2 x 18 W TC-TEL

All technical details, as well as weights and dimensions have been carefully compiled. Errors excepted. Product images are for indicative purposes only and may differ from the original. We reserve the right to make changes for the purpose of further development.



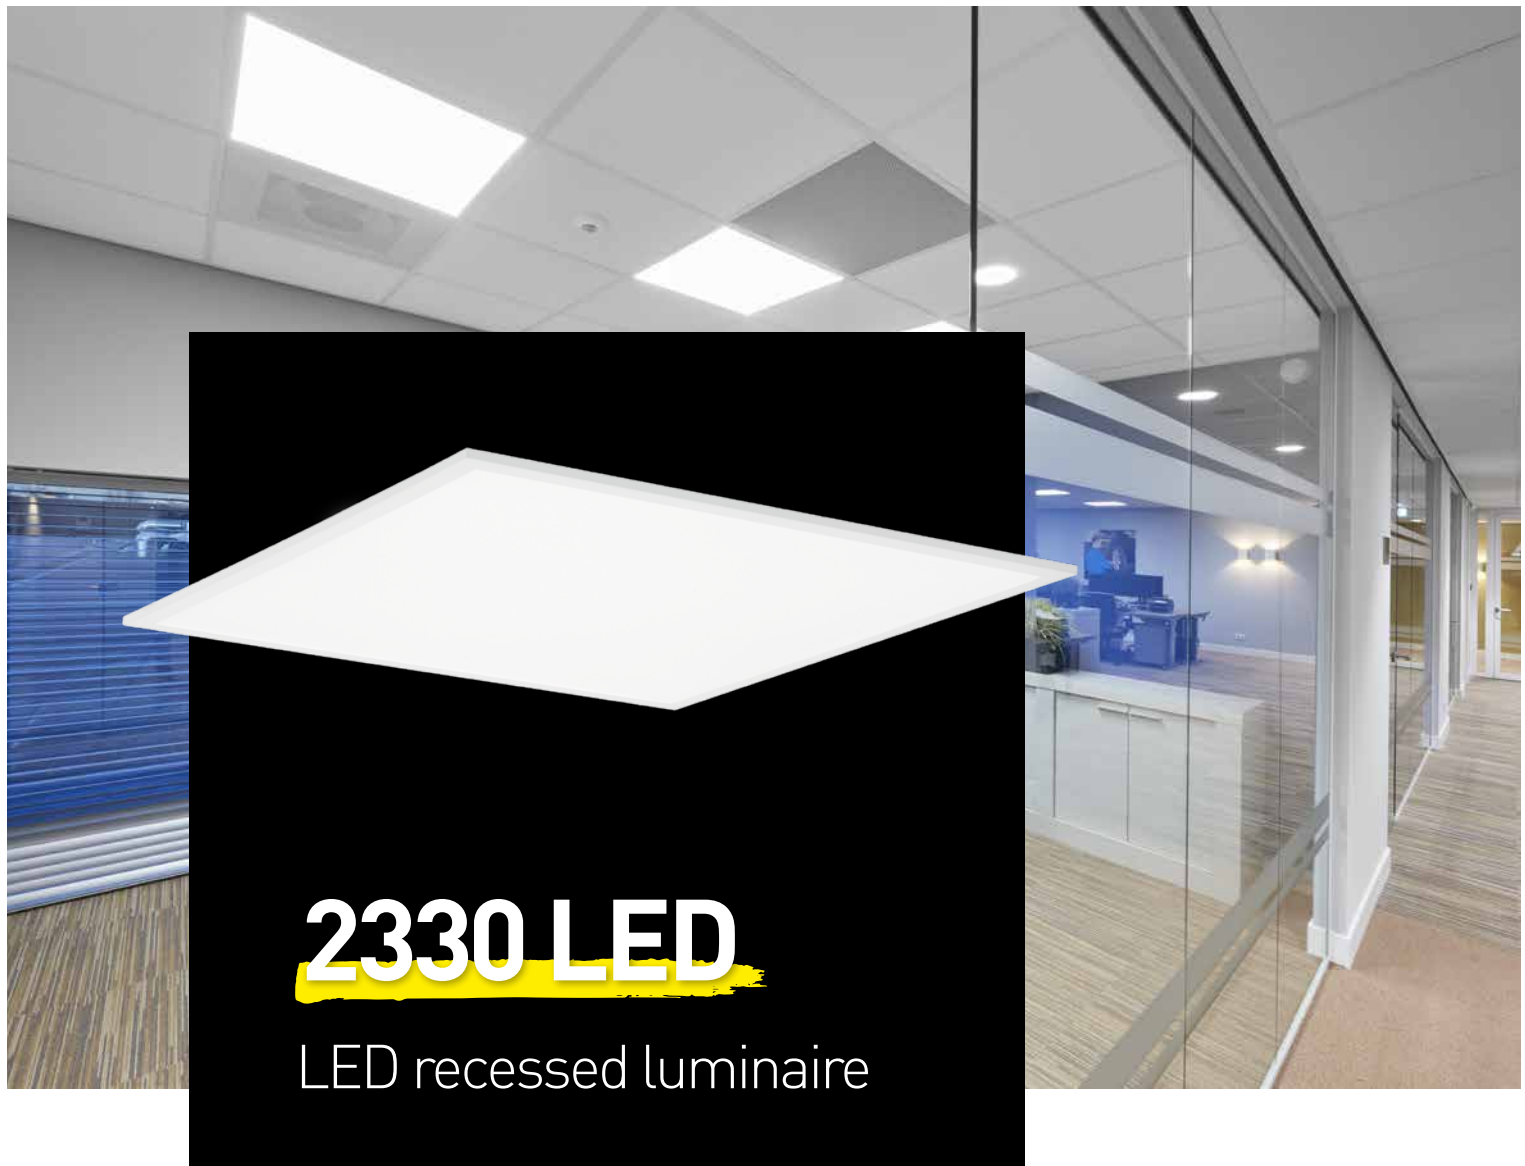



2330 LED is a recessed luminaire for system ceilings in 600 x 600 mm grid size. It scores points with pleasantly uniform light distribution and with $UGR < 19$ is suitable for VDU workstations. Thanks to multi-lumen technology, the luminaire luminous flux can be adapted to conditions on location. Typical applications are offices, corridors, foyers, conference rooms, sales areas and waiting zones. This will get the job done!



**Why you'll get the
job done with the
2330 LED recessed
luminaire**

- Flexible modification of luminaire luminous flux (3,600 lm, 2,900 lm) thanks to multi-lumen technology.
- Pleasant light effect due to uniform illumination, suitable for VDU workstations ($UGR < 19$).
- Separate control gear unit simplifies installation (and replacement).
- 1:1 replacement of conventional luminaires offering time and cost savings during refurbishment.
- Can be covered with insulation material.
- High efficiency (up to 110 lm/W) and reliable service life (50,000 h, L65).
- Additional installation possibilities (ceiling surface-mounting frame and suspension accessories available separately)

2330 LED at a glance

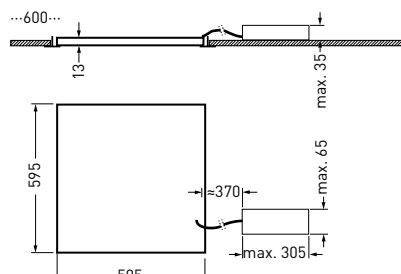

Dimensions (L x W x H):

595 x 595 x 11 / 13 mm

Colour Temperature:

3,000 K, 4,000 K

Protection rating, safety class:

IP20 / IK02 / I

Luminaire luminous flux:

3,600 lm, 2,900 lm (multi-lumen)

Connected load:

33 W, 25 W

Weight:

2.3 kg

Colour Rendering Index:

Ra > 80

All versions of 2330 LED


Product reference	TOC	Luminous flux [lm]	Wattage [W]	Light colour [K]	Dimensions L x W x H [mm]	Replacement
DALI dimmable						
2330 G2 M73 OTA19 3600-830 ETDD	73 736 51	3,300	33	3,000	595 x 595 x13	3 x 14 / 4 x 14 / 3 x 18 / 4 x 18 W
2330 M73 OTA19 3600-840 ETDD	72 408 51	3,600	33	4,000	595 x 595 x11	3 x 14 / 4 x 14 / 3 x 18 / 4 x 18 W
Multi-lumen (adjustable luminaire luminous flux)						
2330 M73 OTA19 36/29/ML-830 ET	72 403 40	3,400 / 2,800	33 / 28	3,000	595 x 595 x11	3 x 14 / 4 x 14 / 3 x 18 / 4 x 18 W
2330 G2 M73 OTA19 36/29/ML-840 ET	73 733 40	3,600 / 2,900	33 / 25	4,000	595 x 595 x13	3 x 14 / 4 x 14 / 3 x 18 / 4 x 18 W

Accessories 2330

Product reference	TOC	Description	Dimensions L x W x H [mm]	Weight
2330 ZH/M84	73 773 00	Suspension kit	100 x 80 x 15	0.3 kg
2330 ZD/M84	75 165 00	Surface-mounting frame	602 x 602 x 58	1.9 kg

All technical details, as well as weights and dimensions have been carefully compiled. Errors excepted. Product images are for indicative purposes only and may differ from the original. We reserve the right to make changes for the purpose of further development.



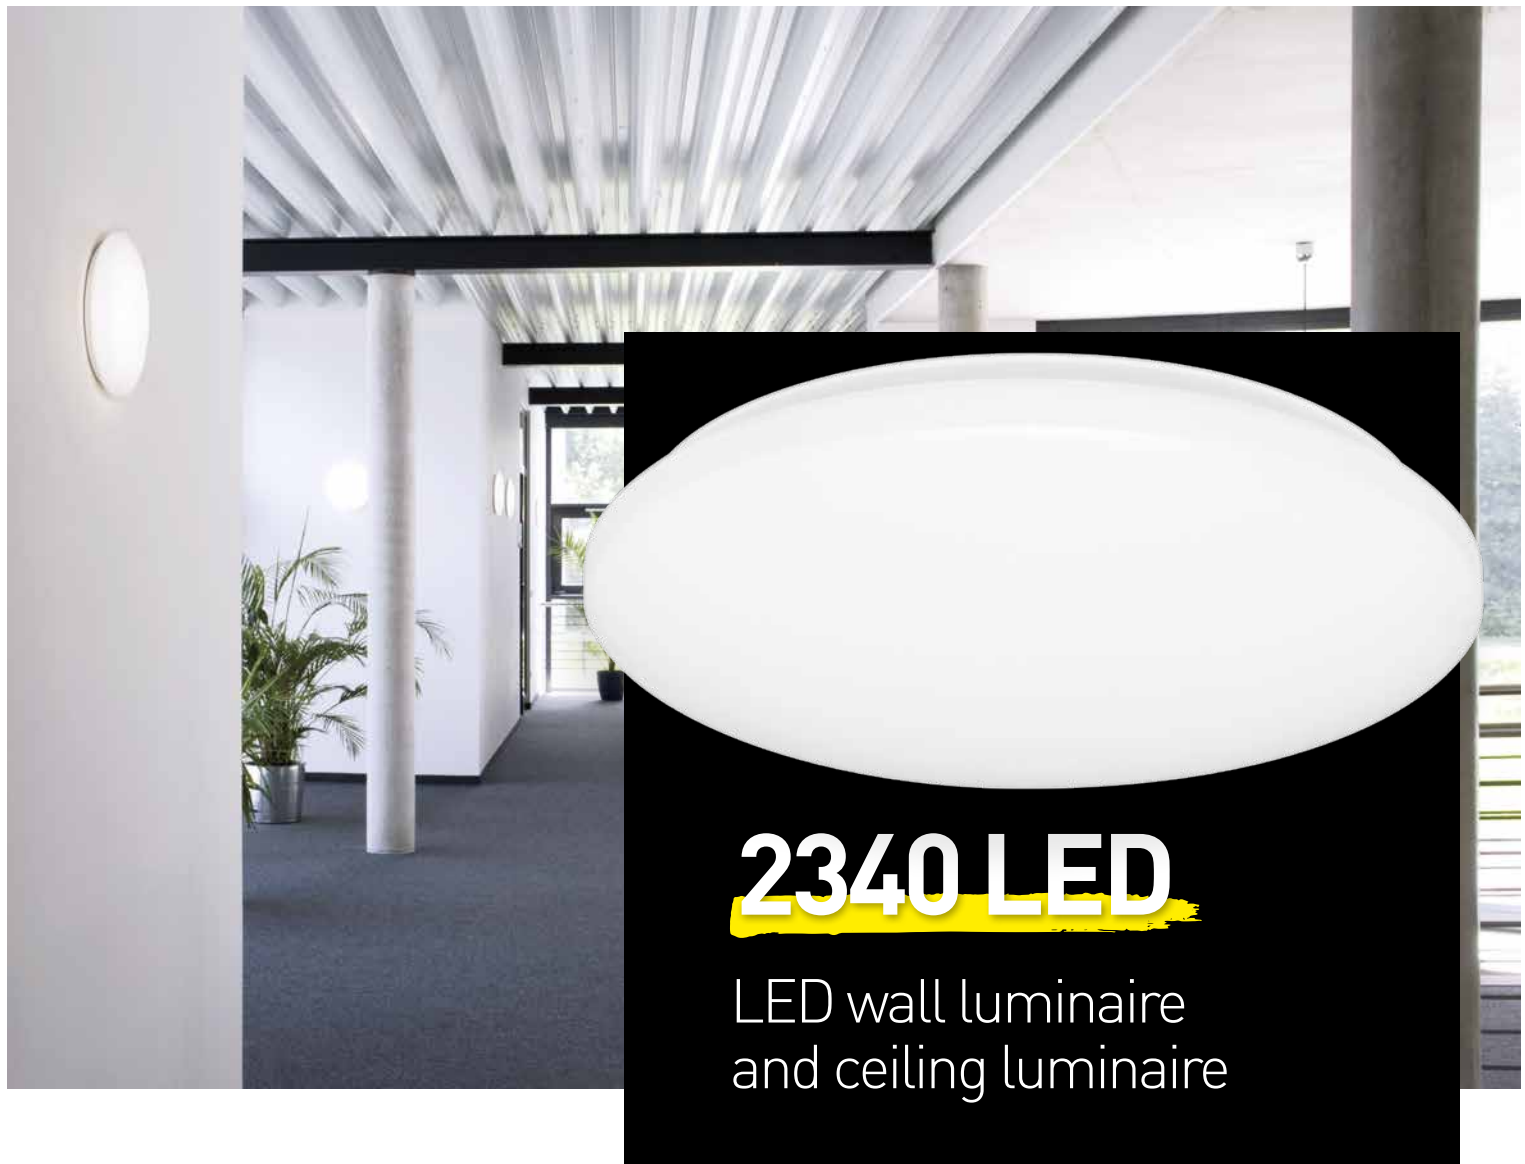


The 2340 LED is super flexible in use. Whether as a wall or ceiling luminaire, it fulfils almost all lighting tasks thanks to its multi-lumen technology in three steps from 800 to 2,200 lumens. Applications consist of corridors, stairwells, entrance areas, relaxation rooms, hotels, restaurants, living areas, educational, health and care facilities. This will get the job done!



Why you'll get the job done with the 2340 LED wall and ceiling luminaire

- Flexible modification of luminaire luminous flux (2,200 lm, 1,400 lm and 800 lm) thanks to multi-lumen technology.
- Optionally with integrated HF motion sensor.
- Uniform front illumination with slight indirect ceiling or wall brightening.
- Replacement for conventional luminaires in refurbishment projects.
- Time savings due to quick and easy installation using functional bayonet catch and drilling template.
- High efficiency (up to 115 lm/W) and reliable service life (50,000 h, L65).

2340 LED at a glance

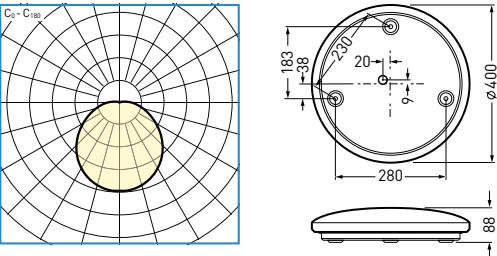

Dimensions (Ø x H):

Ø 400 x 88 mm

Colour temperature:

3,000 K, 4,000 K

Protection rating, safety class:

IP20 / IK02 / I

Luminaire luminous flux:

2,200 lm, 1,400 lm, 800 lm
(multi-lumen)

Connected load:

19 W, 14 W, 8 W

Weight:

0.9 kg

All versions of 2340 LED

Product reference	TOC	Luminous flux [lm]	Wattage [W]	Light colour [K]	Dimensions Ø x H [mm]	Replacement
Multi-lumen (adjustable luminaire luminous flux) with Sensor						
2340 WD2 22/14/08/ML-830 ET +HFS	73 764 40	2,200 / 1,400 / 800	19 / 14 / 8	3,000	Ø 400 x 88	1 x 36 W TC-F
2340 WD2 22/14/08/ML-840 ET +HFS	73 763 40	2,200 / 1,400 / 800	19 / 14 / 8	4,000	Ø 400 x 88	1 x 36 W TC-F
Multi-lumen (adjustable luminaire luminous flux)						
2340 WD2 LED 22/14/08/ML-830 ET	72 399 40	2,200 / 1,400 / 800	18 / 14 / 7	3,000	Ø 400 x 88	1 x 36 W TC-F
2340 WD2 LED 22/14/08/ML-840 ET	71 434 40	2,200 / 1,400 / 800	18 / 14 / 7	4,000	Ø 400 x 88	1 x 36 W TC-F

All technical details, as well as weights and dimensions have been carefully compiled. Errors excepted. Product images are for indicative purposes only and may differ from the original. We reserve the right to make changes for the purpose of further development.






2345 LED is versatile in use. As a wall or ceiling luminaire it fulfils nearly any lighting task thanks to its multi-lumen technology with three levels from 1,000 to 2,000 lm. Application areas are corridors, staircases, entrance areas, humid environments and canopied outdoor areas. This will get the job done!



Why you'll get the job done with the 2345 LED wall and ceiling luminaire

- Flexible luminaire luminous flux setting (2,000 lm, 1,400 lm and 1,000 lm) thanks to multi-lumen technology.
- Fulfils various lighting tasks with only one size.
- High IP protection rating (IP65) for canopied outdoor applications.
- 1:1 replacement of conventional luminaires offering time and cost savings during refurbishment.
- Theft protection through additional screw locking device.
- Optionally with integrated HF motion sensor.
- Service life 50,000 h.

2345 LED at a glance

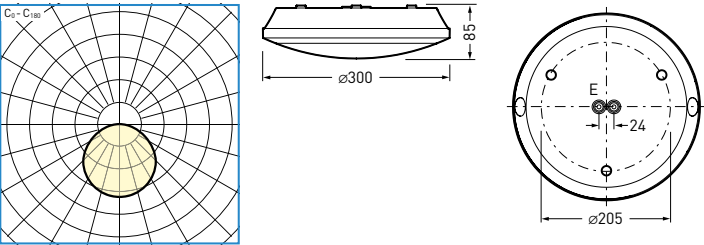

Dimensions (Ø x H): Ø 300 x 85 mm	Colour temperature: 3,000 K, 4,000 K	Protection rating, safety class: IP65 / IK10 / II
Luminaire luminous flux: 2,000 lm, 1,400 lm, 1,000 lm (multi-lumen)	Connected load: 21 W, 14 W, 11 W	Weight: 0.9 kg

All variants of 2345 LED

Product reference	TOC	Luminous flux [lm]	Wattage [W]	Light colour [K]	Dimensions Ø x H [mm]	Replacement
Multi-lumen (adjustable luminaire luminous flux) with Sensor						
2345 WD1 20/14/10/ML-830 ET IP65 +HFS	73 769 40	2,000 / 1,400 / 1,000	21 / 14 / 11	3,000	Ø 300 x 85	1 x 36 W
2345 WD1 20/14/10/ML-840 ET IP65 +HFS	73 767 40	2,000 / 1,400 / 1,000	21 / 14 / 11	4,000	Ø 300 x 85	1 x 36 W
Multi-lumen (adjustable luminaire luminous flux)						
2345 WD1 20/14/10/ML-830 ET IP65	73 768 40	2,000 / 1,400 / 1,000	21 / 14 / 11	3,000	Ø 300 x 85	1 x 36 W
2345 WD1 20/14/10/ML-840 ET IP65	73 766 40	2,000 / 1,400 / 1,000	21 / 14 / 11	4,000	Ø 300 x 85	1 x 36 W



2350 LED

LED surface-mounted luminaire




The 2350 LED surface-mounted luminaire is the clever solution for standard-compliant illumination in e.g. offices, corridors, foyers, conference rooms, sales areas, waiting zones, educational, health and care facilities. With two sizes and flexible luminous flux packages, the right lighting solution is available for any type of room. This will get the job done!



Why you'll get the job done with the 2350 LED surface-mounted luminaire

- Flexible modification of luminaire luminous flux thanks to multi-lumen technology.
- 1:1 replacement of conventional luminaires during refurbishment.
- Quick and easy mounting saves time.
- Pleasant light effect due to uniform illumination, suitable for VDU workstations (UGR < 19).
- High efficiency (up to 111 lm/W) and reliable service life (50,000 h, L65).
- Attractive price-performance ratio.

2350 LED at a glance

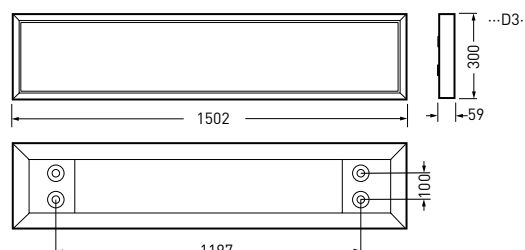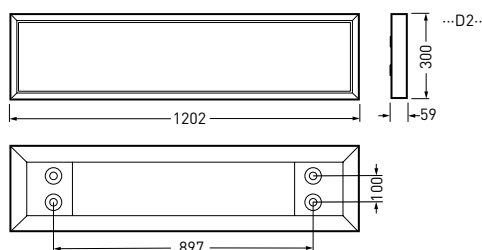

Dimensions (L x W x H):

D2: 1202 x 300 x 59 mm

D3: 1502 x 300 x 59 mm

Colour Rendering Index: Ra > 80

Colour Temperature: 3,000 K, 4,000 K

Protection rating, safety class:

IP20 / IK02 / I

Luminaire luminous flux:

D2: 4,000 lm, 3,000 lm (multi-lumen)

D3: 6,000 lm, 4,000 lm (multi-lumen)

Connected load:

D2: 36 W, 25 W

D3: 54 W, 38 W

Weight:

D2: 5.0 kg


D3: 6.0 kg

All versions of 2350 LED

Product reference	TOC	Luminous flux [lm]	Wattage [W]	Light colour [K]	Dimensions L x W x H [mm]	Replacement
DALI dimmable						
2350 G2 D2 OTA19 4000-830 ETDD	73 741 51	3,700	36	3,000	1202 x 300 x 59	2 x 28 W
2350 G2 D2 OTA19 4000-840 ETDD	73 740 51	4,000	36	4,000	1202 x 300 x 59	2 x 28 W
2350 G2 D3 OTA19 6000-830 ETDD	73 745 51	5,600	54	3,000	1502 x 300 x 59	2 x 35 W
2350 G2 D3 OTA19 6000-840 ETDD	73 744 51	6,000	54	4,000	1502 x 300 x 59	2 x 35 W
Multi-lumen (adjustable luminaire luminous flux)						
2350 G2 D2 OTA19 40/30/ML-830 ET	73 739 40	3,700 / 2,800	36 / 25	3,000	1202 x 300 x 59	2 x 28 W
2350 G2 D2 OTA19 40/30/ML-840 ET	73 738 40	4,000 / 3,000	36 / 25	4,000	1202 x 300 x 59	2 x 28 W
2350 G2 D3 OTA19 60/40/ML-830 ET	73 743 40	5,600 / 4,000	54 / 38	3,000	1502 x 300 x 59	2 x 35 W
2350 G2 D3 OTA19 60/40/ML-840 ET	73 742 40	6,000 / 4,300	54 / 38	4,000	1502 x 300 x 59	2 x 35 W

All technical details, as well as weights and dimensions have been carefully compiled. Errors excepted. Product images are for indicative purposes only and may differ from the original. We reserve the right to make changes for the purpose of further development.



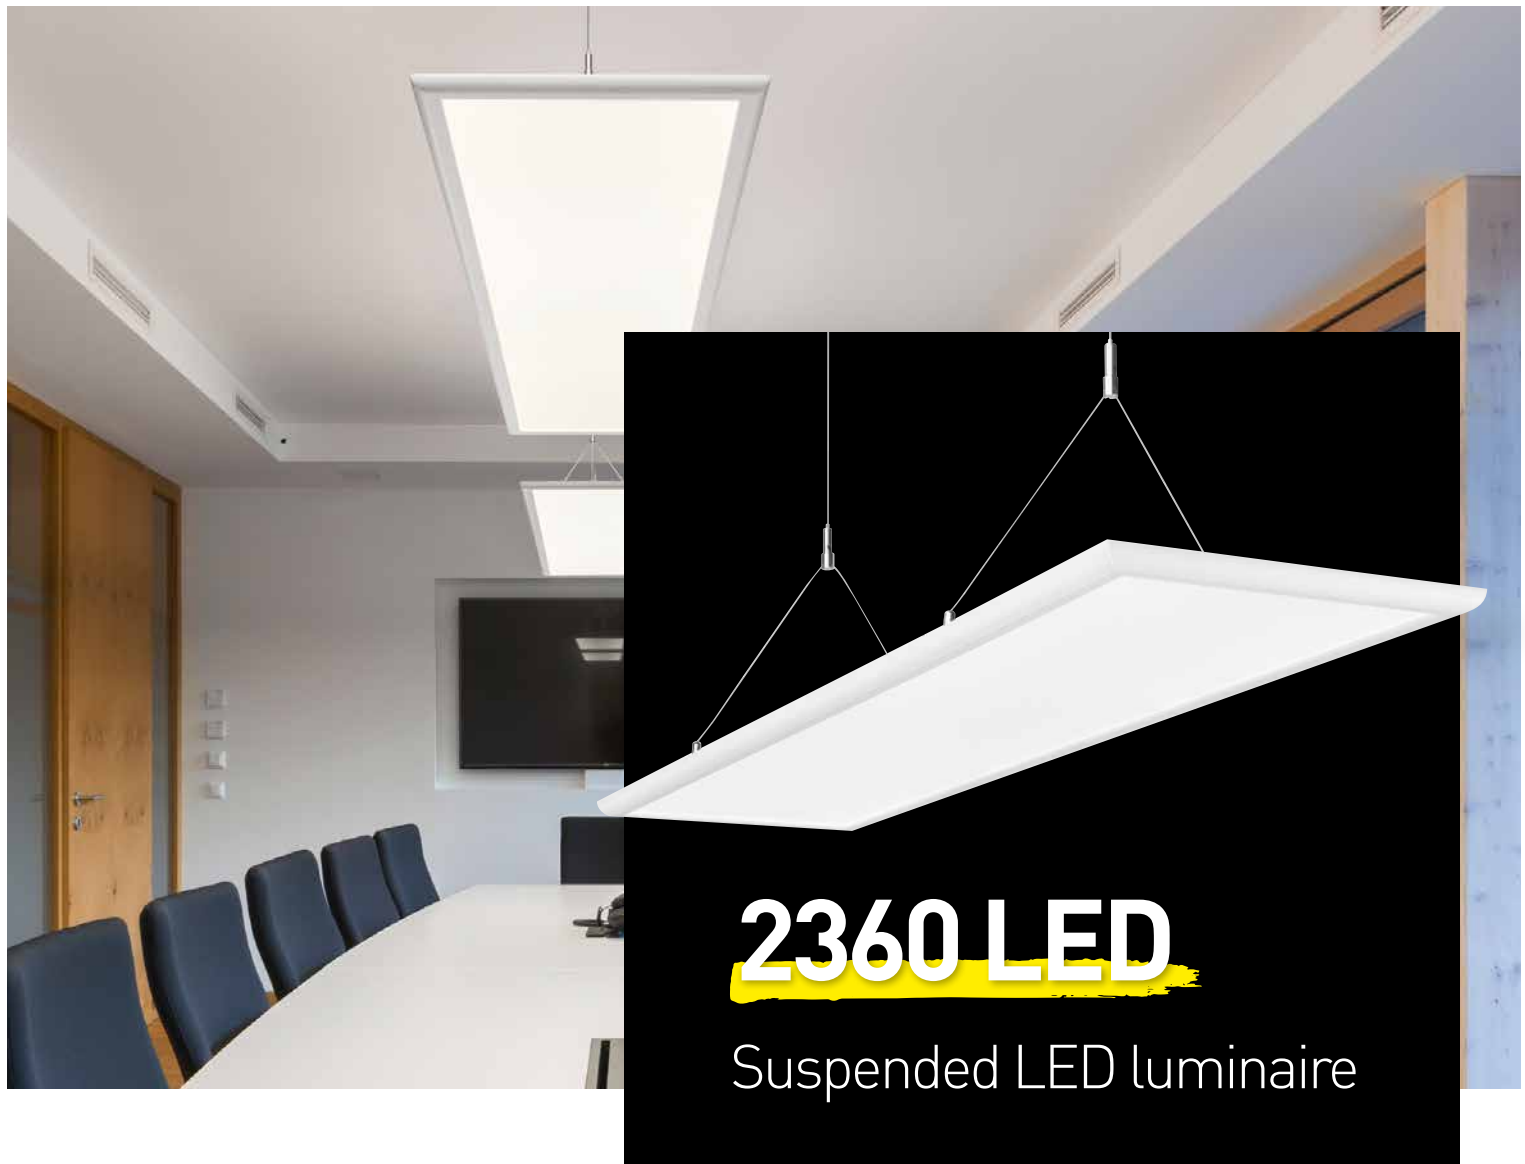


The 2360 LED is the smart suspended luminaire for standard-compliant lighting e.g. in offices, meeting rooms, banks, schools and educational facilities. This will get the job done!



Why you'll get the job done with the 2360 LED suspended luminaire

- Pleasant light effect thanks to uniform illumination with direct and indirect light output.
- Especially for VDU workstations (UGR <19).
- 1:1 replacement of conventional luminaires offering time and cost savings during refurbishment.
- High efficiency (110 lm/W) and solid service life (50,000 h, L65).
- Attractive price-/performance ratio.

2360 LED at a glance

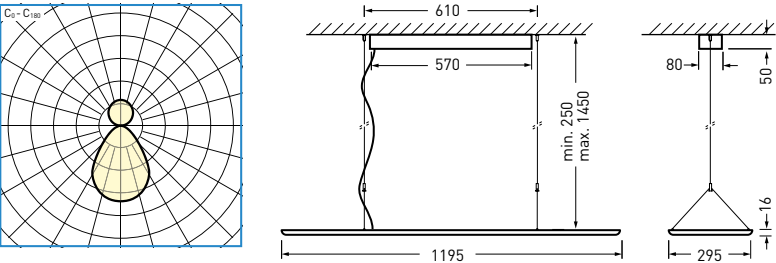

Dimensions (L x W x H):
1195 x 295 x 16 mm

Colour Rendering Index:
Ra > 80

Protection rating, safety class:
IP20 / IK02 / I

Luminaire luminous flux:
4,400 lm

Colour Temperature:
3,000 K, 4,000 K

Weight:
5.3 kg

Connected load: 40 W

All variants of 2360 LED

Product reference	TOC	Luminous flux [lm]	Wattage [W]	Light colour [K]	Dimensions L x W x H [mm]	Replacement
DALI dimmable						
2360 H1 PW19-IL 4000-830 ETDD	73 775 51	4,400	40	3,000	1195 x 295 x 16	1 x 54 W / 2 x 28 W
2360 H1 PW19-IL 4000-840 ETDD	73 776 51	4,400	40	4,000	1195 x 295 x 16	1 x 54 W / 2 x 28 W
Switchable						
2360 H1 PW19-IL 4000-830 ET	73 775 40	4,400	40	3,000	1195 x 295 x 16	1 x 54 W / 2 x 28 W
2360 H1 PW19-IL 4000-840 ET	73 776 40	4,400	40	4,000	1195 x 295 x 16	1 x 54 W / 2 x 28 W

All technical details, as well as weights and dimensions have been carefully compiled. Errors excepted. Product images are for indicative purposes only and may differ from the original. We reserve the right to make changes for the purpose of further development.








The 2380 LED is a highbay luminaire for trade fair and exhibition halls, production facilities and warehouses. With IP65 it is also suitable for damp rooms and is available in three lumen packages. Single-point suspension means the luminaire is a simple 1:1 refurbishment solution. This will get the job done!



Why you'll get the job done with the 2380 LED highbay luminaire

- Simple mounting thanks to single-point suspension small size and light aluminium housing.
- Suspension kit available as an accessory.
- 1:1 replacement of conventional luminaires offering time and cost savings during refurbishment.
- 1.5 m power cord
- Efficient illumination of high halls thanks to to lens optic with narrow-wide light distribution.
- Service life 50,000 h (L65).

2380 LED at a glance



Dimensions (Ø x H):

Ø 270 x 160 mm*

Ø 320 x 190 mm

Colour temperature:

4,000 K

Protection rating:

IP65 / IK08 / I

Luminaire luminous flux:

10,000 lm*, 20,000 lm, 30,000 lm

Connected load:

77 W*, 150 W, 230 W

Weight:

2.3 kg*, 4.0 kg, 4.5 kg

All versions of 2380 LED

Product reference	TOC	Luminous flux [lm]	Wattage [W]	Light colour [K]	Dimensions Ø x H [mm]	Replacement
2380 TB 10000-840 ET*	76 308 40	10,000	77	4,000	Ø 270 x 160	150 W HQI / HSE
2380 TB 20000-840 ET	71 433 40	20,000	150	4,000	Ø 320 x 190	250 W / 400 W HQL 250 W HQI / HSE
2380 TB 30000-840 ET	71 432 40	30,000	230	4,000	Ø 320 x 190	400 W HQI / HSE

Accessories 2380

Product reference	TOC	Description
Ondo LED E 01K	65 887 00	Ceiling-mounting plate with 3 carabiner hooks
E04 Suspension kit – link chain	23 434 00	Suspension kit – Galvanised link chain (20 m)

* Available from October 2020

All technical details, as well as weights and dimensions have been carefully compiled. Errors excepted. Product images are for indicative purposes only and may differ from the original. We reserve the right to make changes for the purpose of further development.



Your TRILUX twenty3 Sales partner: