

SMK

Wall mount rack

Structure



Features:

Exquisite design with precise dimensions and craftsmanship
 Easy installation
 Optional locks for side panels
 Closable top/bottom cable entry openings
 Removable side panels and front/back doors for operation and watching
 Casters or support feet can be installed when it's on ground
 Doors can be opened from the left or right
 Top cover is available to fans

Main material:


Cold-rolled steel

Surface treatment:

Degreasing, pickling, phosphating, laundering, powder coating
 Doors can be opened from the left or right

Load capacity:

Static load:60KG

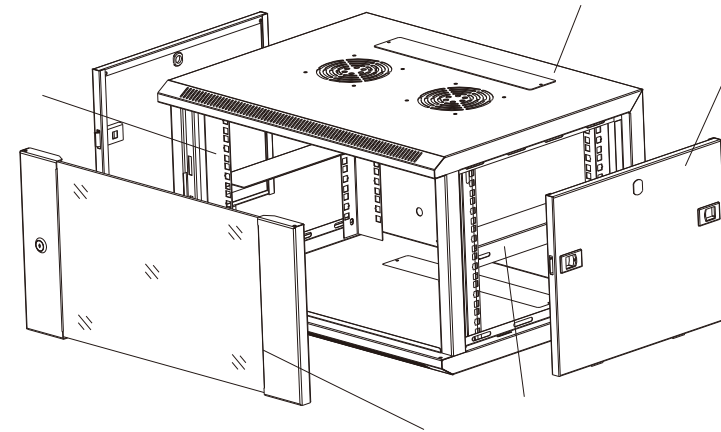

1.frame
 2.front door
 3.side panel

5.L-shaped bar

Size




Side



Adjustable front/back



Earthing screw inside

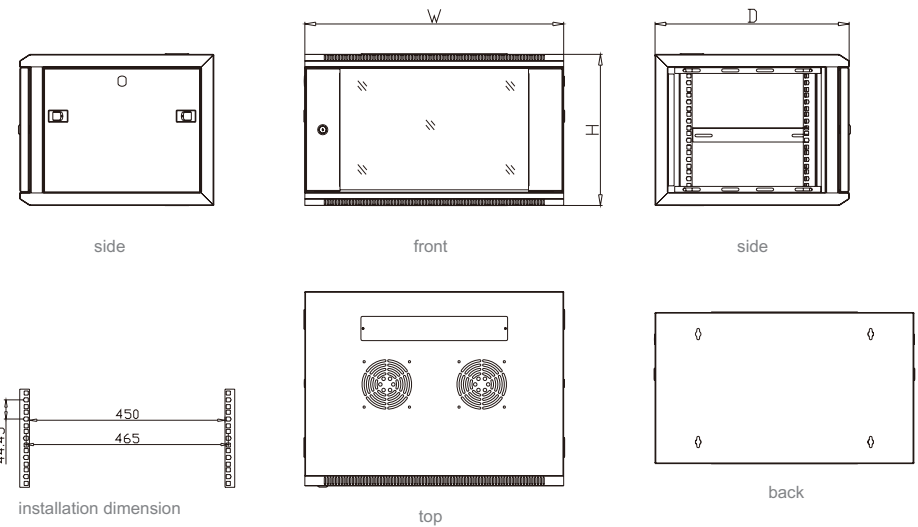

Technical parameters

NO.	NAMES	QUANTITY	UNIT	MATERIALS	SURFACE TREATMENT	REMARKS
1	frames	1	pc	1.0mm cold-rolled steel	powder coating	
2	front doors	1	pc	4mm tempered glasses 1.2mm cold-rolled steel		
3	side doors	2	pc	1.0mm cold-rolled steel	powder coating	
4	profile rails	4	pc	1.5mm cold-rolled steel	powder coating	
5	L-shaped panels	2	pc	1.2mm cold-rolled steel	powder coating	
6	cage nuts	20	pc			

TYPES	SMK6407	SMK6409	SMK6412	SMK6416
CAPACITY(U)	7U	9U	12U	16U
WIDTH	600	600	600	600
/DEPTH	450	450	450	450
/HEIGHT	416	483	616	816
WHOLE PACKAGE				
WIDTH	620	620	620	620
/DEPTH	470	470	470	470
/HEIGHT	436	500	635	836
VOLUMES (M ³)	0.108	0.146	0.185	0.223

COLOURS

BLACK(RAL9005) =A

GREY & RAL7035 =B

